
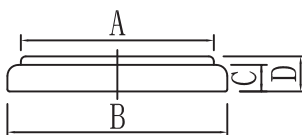


Lithium Manganese Dioxide Coin Battery : Individual Specification


CR2032

Nominal Voltage	3V	<p style="text-align: center;">Dimensions (mm)</p> 	A	$\phi 17.4$
Nominal Capacity	210(mAh)		B	$\phi 20.0 \begin{matrix} +0.0 \\ -0.3 \end{matrix}$
Continuous standard load	15(K Ω)		C	2.4
Operating temperature	-20~60°C		D	$3.2 \begin{matrix} +0.0 \\ -0.3 \end{matrix}$
Weight	3.2(g)			


Discharge characteristics

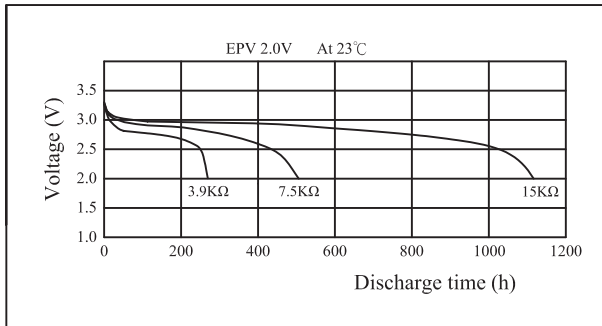


Temperature characteristics

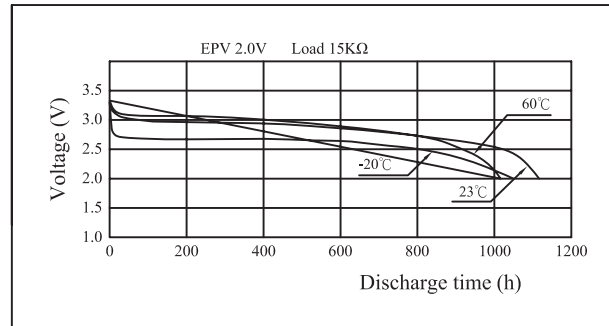


Load vs. Operating voltage

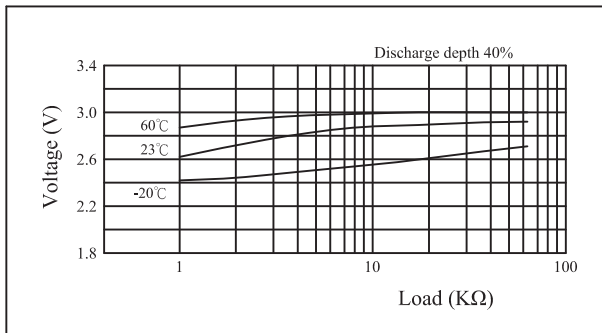

Load vs. Capacity

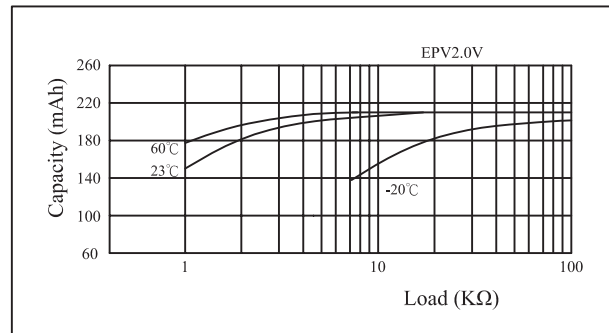

Pulse discharge characteristics

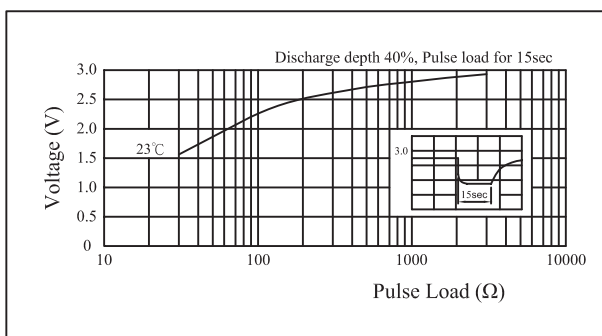

Storage characteristics

