
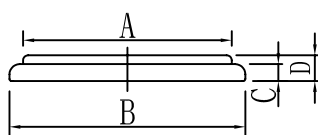


Lithium Manganese Dioxide Coin Battery : Individual Specification


CR2325

| | | | | |
|--------------------------|------------------|--|---|---------------------------|
| Nominal Voltage | 3V | <p style="text-align: center;">Dimensions (mm)</p>  | A | $\phi 20.3$ |
| Nominal Capacity | 190 (mAh) | | B | $\phi 23.0^{+0.0}_{-0.3}$ |
| Continuous standard load | 15 (K Ω) | | C | 1.6 |
| Operating temperature | -20~60°C | | D | $2.5^{+0.0}_{-0.3}$ |
| Weight | 3.3 (g) | | | |


Discharge characteristics

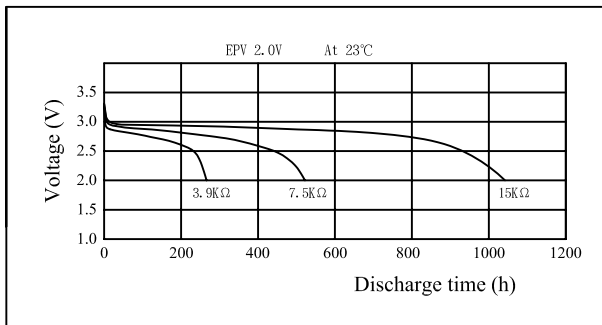


Temperature characteristics

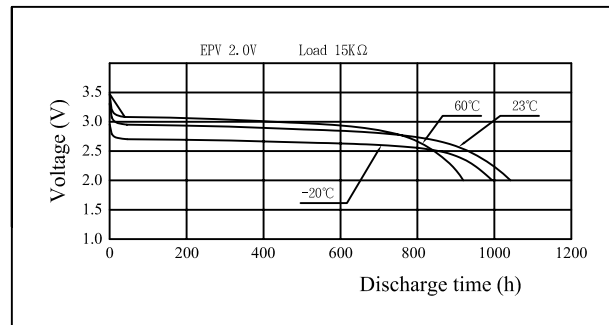


Load vs. Operating voltage

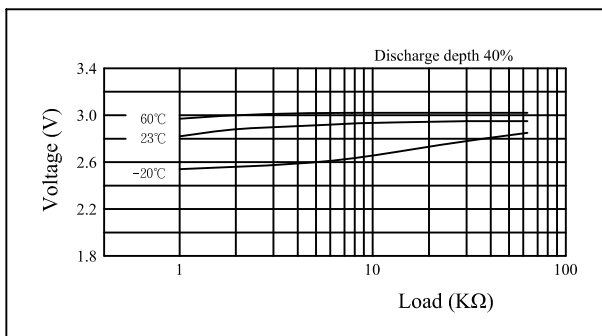

Load vs. Capacity

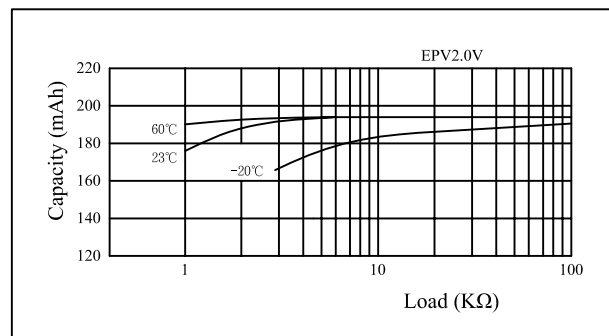

Pulse discharge characteristics

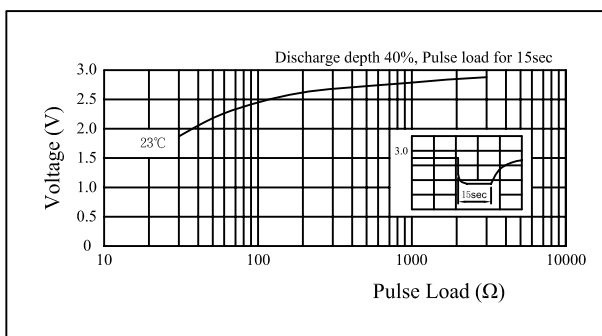

Storage characteristics

