
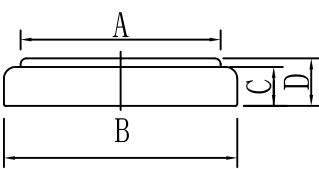


Lithium Manganese Dioxide Coin Battery : Individual Specification


CR2450C

Nominal Voltage	3V	 <p>Dimensions (mm)</p>	A	$\phi 21.5$
Nominal Capacity	600 (mAh)		B	$\phi 24.5^{+0}_{-0.2}$
Continuous standard load	7.5 (K Ω)		C	4.25
Standard Current	0.4 (mA)		D	$5.0^{+0}_{-0.3}$
Continuous Current (Max)	1 (mA)			
Pulse Current (Max)	15 (mA)			
Operating temperature	-20~60°C			
Weight	6.6 (g)			


Discharge characteristics

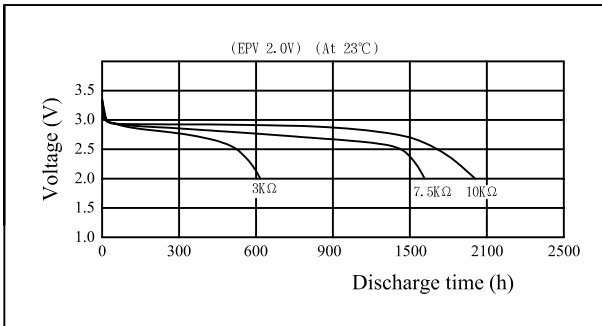


Temperature characteristics

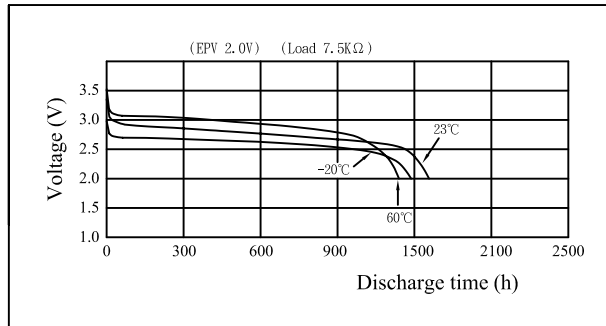


Discharge characteristics

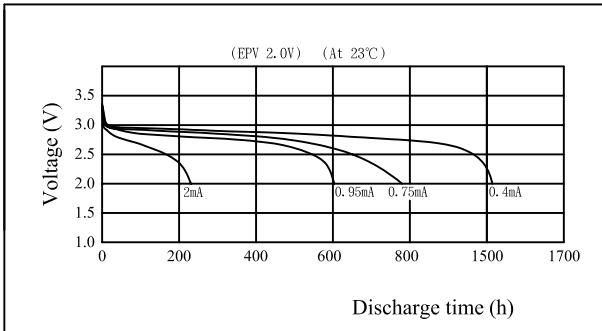

Load vs. Operating voltage

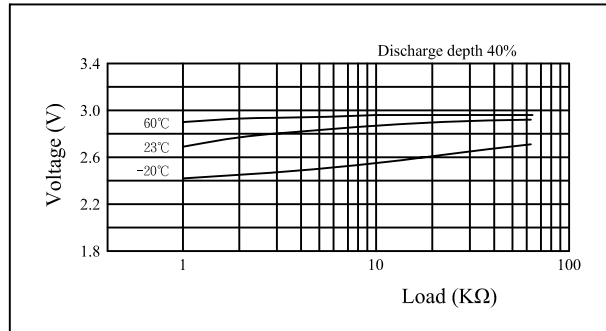

Pulse discharge characteristics

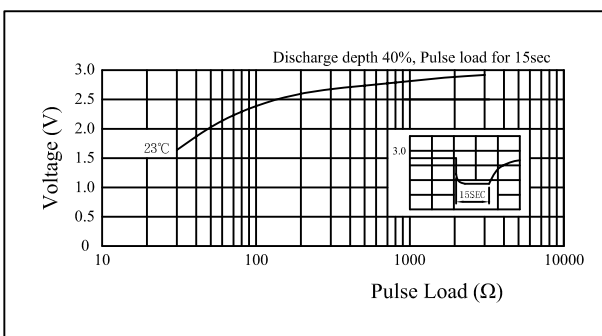

Storage characteristics

