
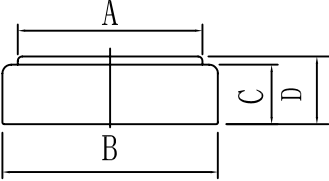


Lithium Manganese Dioxide Coin Battery : Individual Specification


CR2477

Nominal Voltage	3V	Dimensions (mm) 	A	$\phi 21.0$
Nominal Capacity	1000 (mAh)		B	$\phi 24.5 \begin{smallmatrix} +0.0 \\ -0.3 \end{smallmatrix}$
Continuous standard load	4.7 (K Ω)		C	6.8
Operating temperature	-20~60°C		D	$7.7 \begin{smallmatrix} +0.0 \\ -0.3 \end{smallmatrix}$
Weight	10.5 (g)			


Discharge characteristics

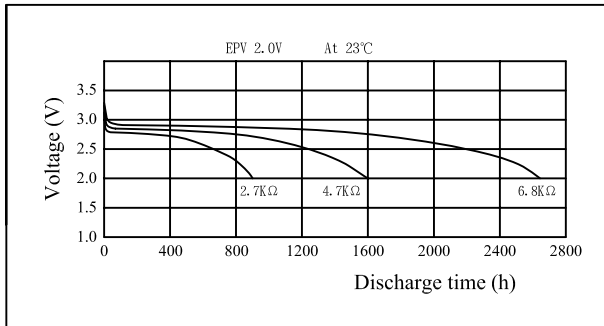


Temperature characteristics

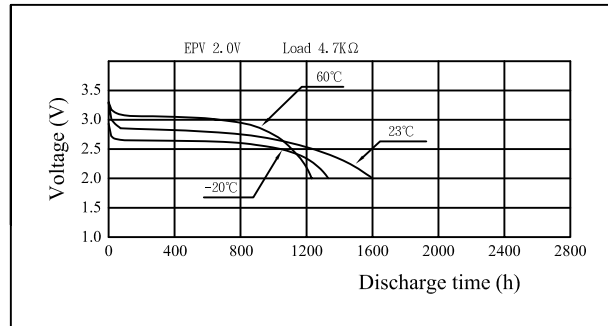


Load vs. Operating voltage

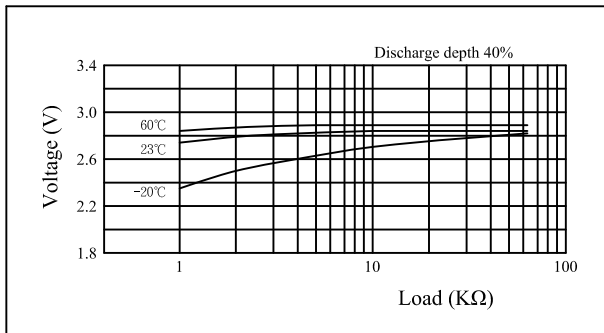

Load vs. Capacity

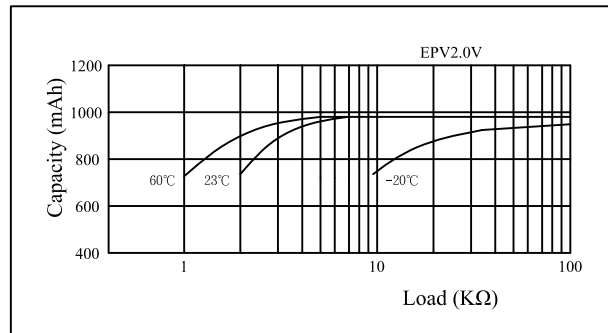

Pulse discharge characteristics

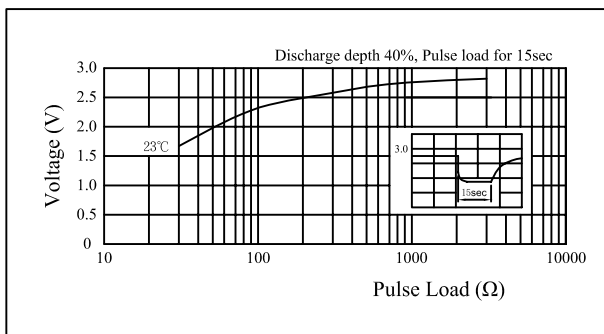

Storage characteristics

