



Lithium Manganese Dioxide Coin Battery : Individual Specification


CR3032

Nominal Voltage	3V	Dimensions (mm) 	A	$\phi 27.3$
Nominal Capacity	500 (mAh)		B	$\phi 30.0^{+0.0}_{-0.3}$
Continuous standard load	7.5 (K Ω)		C	2.5
Operating temperature	-20~60°C		D	$3.2^{+0.0}_{-0.3}$
Weight	6.8g			


Discharge characteristics

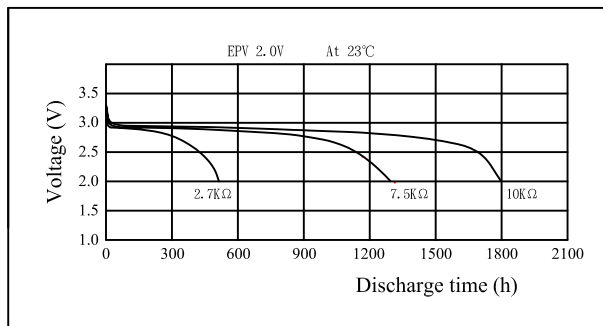


Temperature characteristics

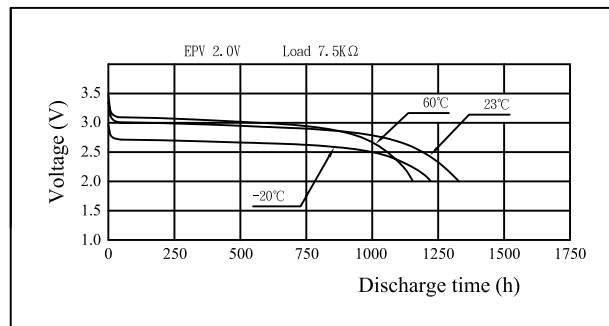


Load vs. Operating voltage

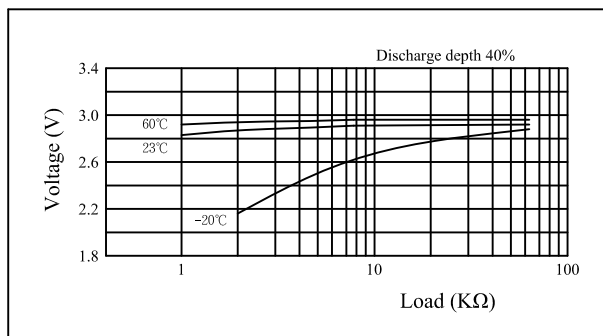

Load vs. Capacity

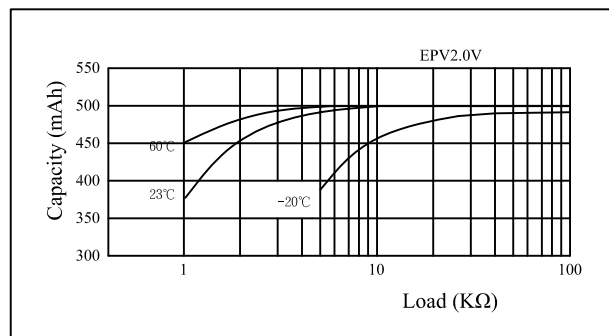

Pulse discharge characteristics

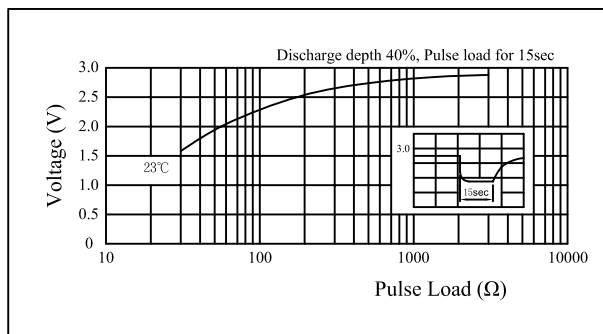

Storage characteristics

