
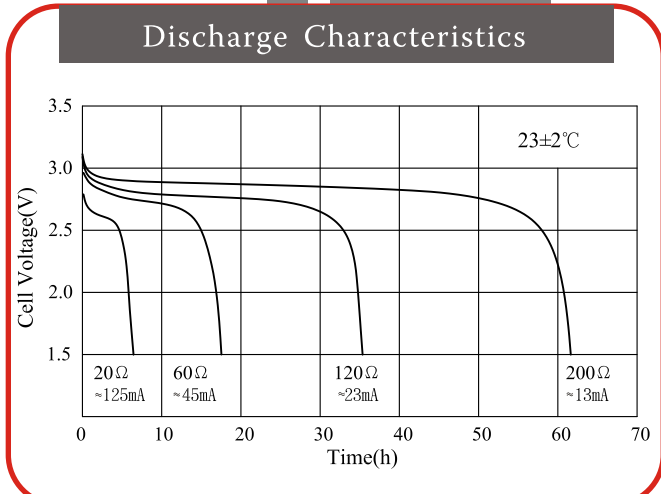
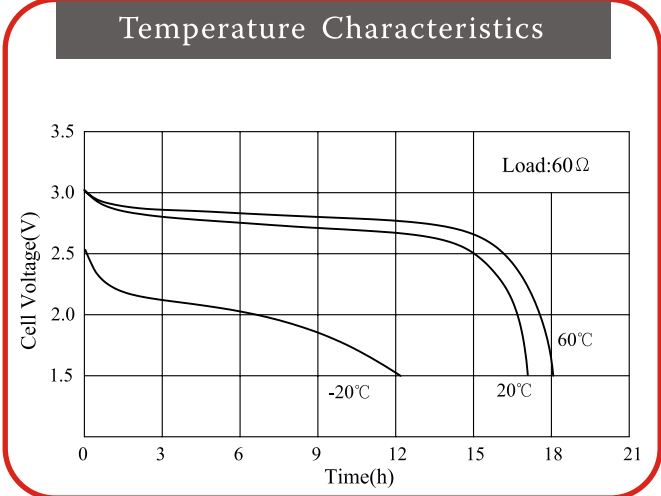


CR14335

Lithium Manganese Dioxide Cylindrical Battery Specification Sheet

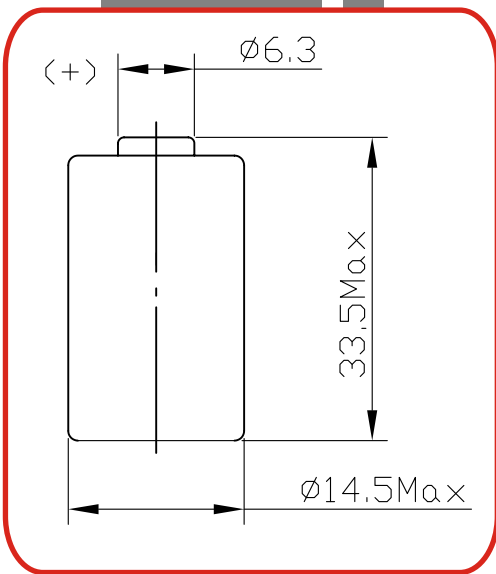

CR14335

| Nominal Capacity (10mA - 2V) 800mAh | Nominal Voltage 3V | Max. Constant Current 1000mA | Max. Pulse Current 2000mA | Weight 14g | Dimension Ø14.5x33.5mm | Operating temperature -40°C~70°C |
|---|-----------------------|---------------------------------|------------------------------|---------------|---------------------------|-------------------------------------|
|---|-----------------------|---------------------------------|------------------------------|---------------|---------------------------|-------------------------------------|

Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

