


# CR14505

## Lithium Manganese Dioxide Cylindrical Battery Specification Sheet

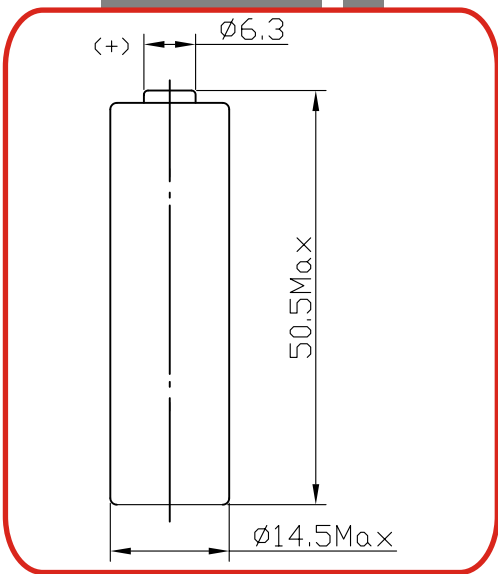


## CR14505

Nominal Capacity (10mA - 2V) 1400mAh	Nominal Voltage 3V	Max. Constant Current 2000mA	Max. Pulse Current 3000mA	Weight 21g	Dimension Ø14.5x50.5mm	Operating temperature -40°C~70°C
--	-----------------------	---------------------------------	------------------------------	---------------	---------------------------	-------------------------------------


### Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

### Pulse Discharge Characteristics

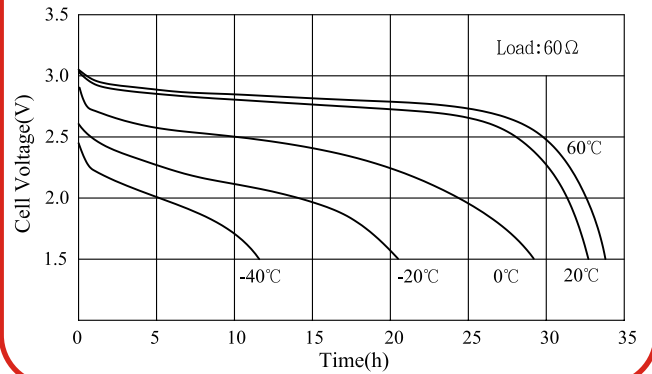

### Discharge Characteristics

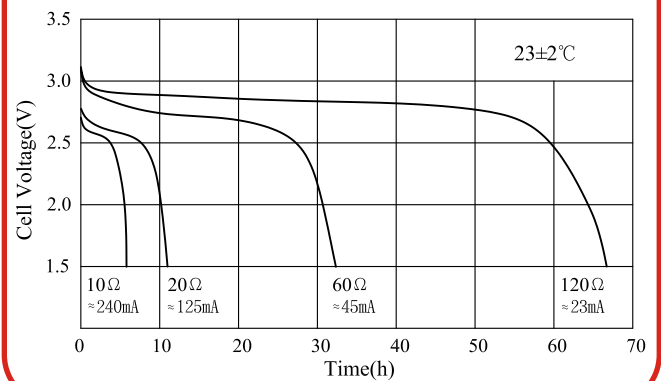

### Load-Capacity Characteristics

