
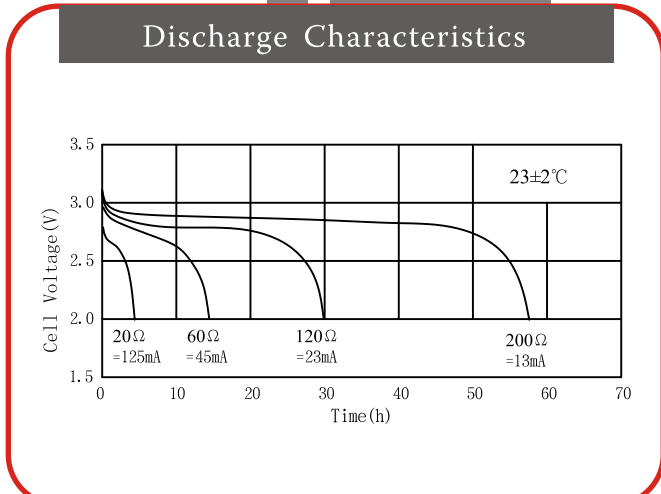
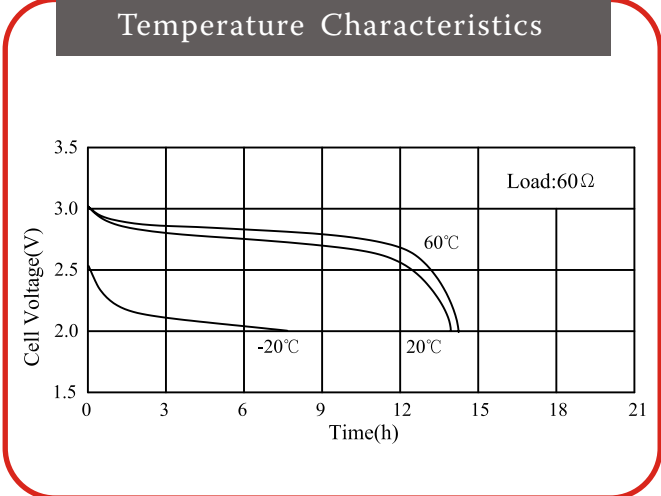


CR17250

Lithium Manganese Dioxide Cylindrical Battery Specification Sheet

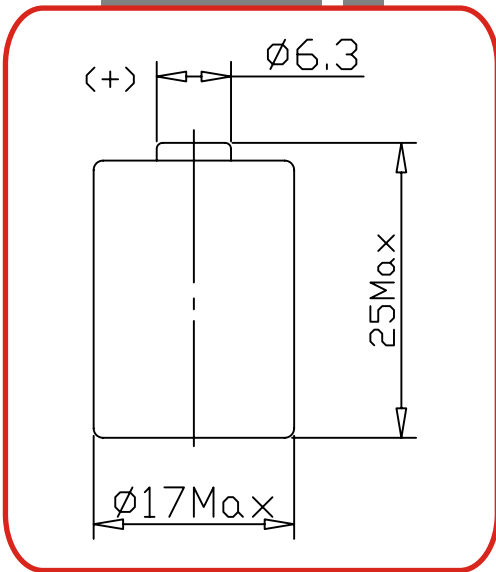

CR17250

Nominal Capacity (5mA - 2V) 750mAh	Nominal Voltage 3V	Max. Constant Current 200mA	Max. Pulse Current 800mA	Weight 14g	Dimension $\phi 17.0 \times 25.0\text{mm}$	Operating temperature $-40^\circ\text{C} \sim 70^\circ\text{C}$
--	-----------------------	--------------------------------	-----------------------------	---------------	---	--

Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

