
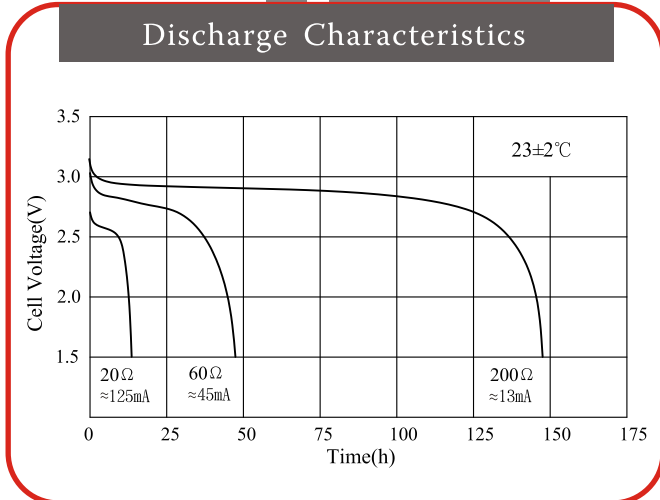
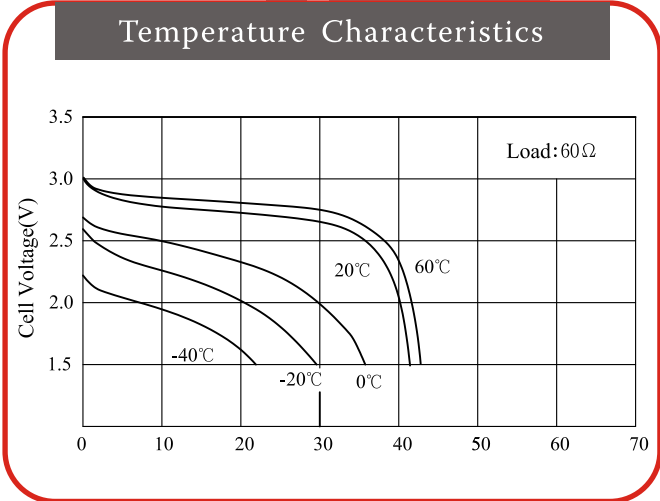


CR17450

Lithium Manganese Dioxide Cylindrical Battery Specification Sheet

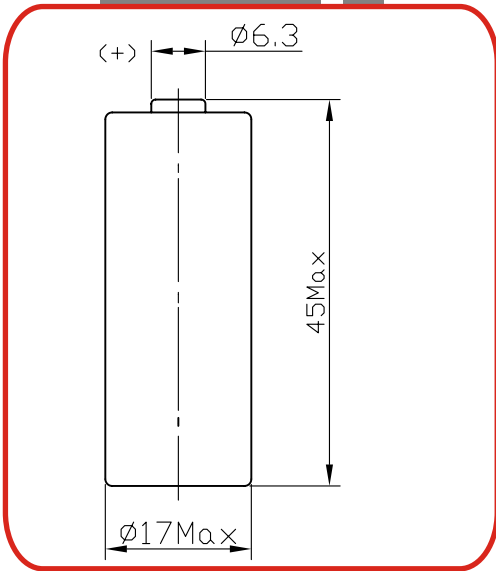

CR17450

Nominal Capacity (10mA - 4V)	Nominal Voltage	Max. Constant Current	Max. Pulse Current	Weight	Dimension	Operating temperature
2000mAh	3V	2000mA	3000mA	26g	Ø17x45mm	-40°C~70°C

Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

