



ER10450

Lithium Thionyl Chloride Cylindrical Battery Specification Sheet

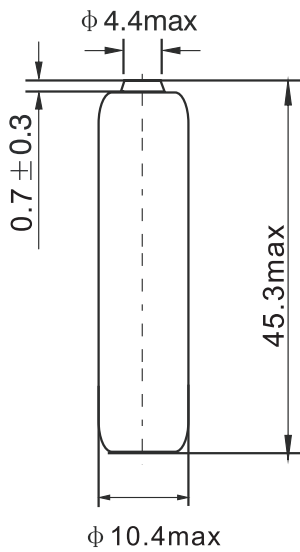


Dimensions in mm

Voltage vs Temperature

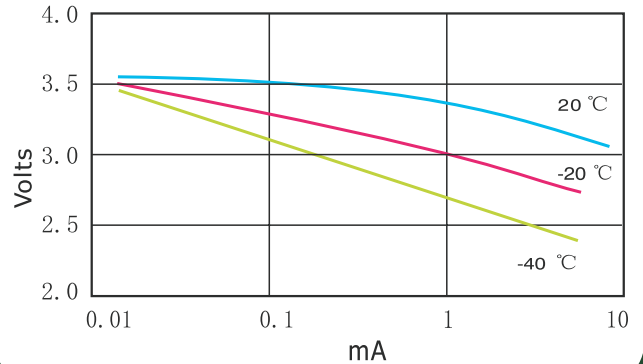

Capacity vs Current

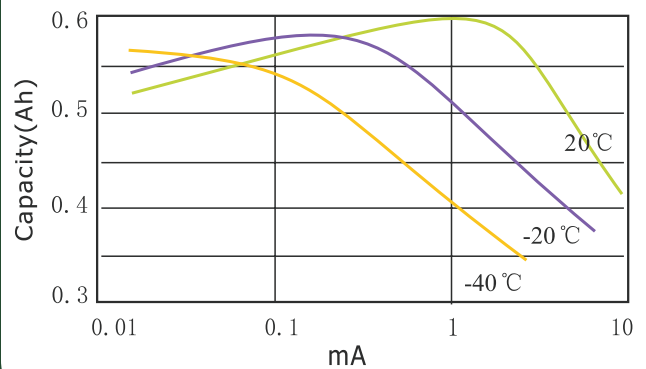

ER10450

Nominal Capacity (1.0mA - 2V)	Nominal Voltage	Max. Constant Current	Max. Pulse Current	Weight	Dimension	Operating temperature
0.6Ah	3.6V	10mA	50mA	8g	Ø10.4x45.3mm	-55°C~85°C

Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

Discharge Characteristics at 23±2°C

