


# ER14250

## Lithium Thionyl Chloride Cylindrical Battery Specification Sheet

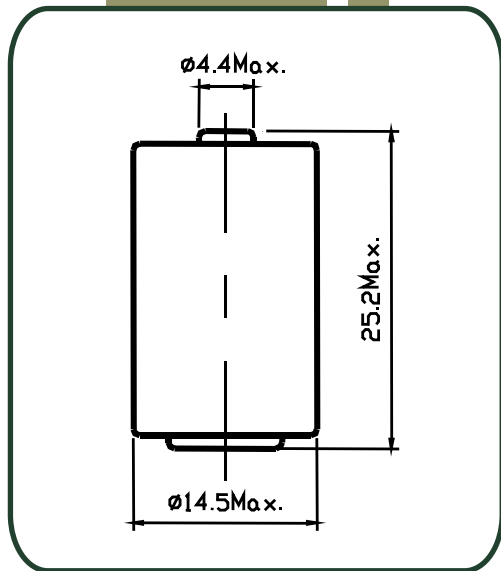


## ER14250

Nominal Capacity (1.2mA - 2V) 1.0Ah	Nominal Voltage 3.6V	Max. Constant Current 50mA	Max. Pulse Current 100mA	Weight 11	Dimension $\phi 14.5 \times 25.2\text{mm}$	Operating temperature $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$
---	-------------------------	-------------------------------	-----------------------------	--------------	---	--


### Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

### Voltage vs Temperature

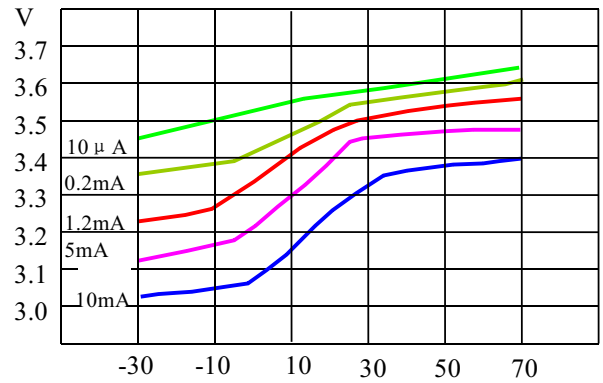

### Capacity vs Current

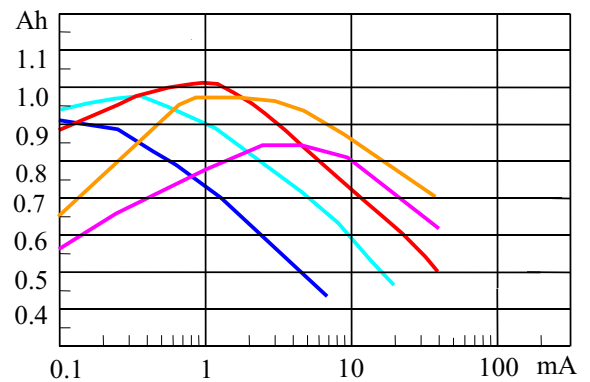

### Discharge Characteristics at $23 \pm 2^{\circ}\text{C}$

