


# ER18505

## Lithium Thionyl Chloride Cylindrical Battery Specification Sheet

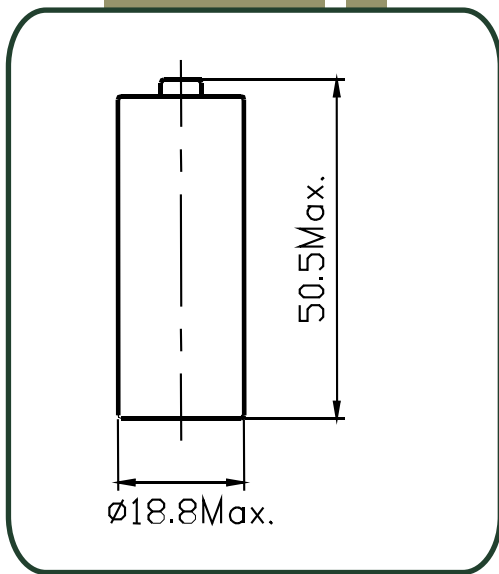


### ER18505

Nominal Capacity (2.0mA - 2V) 3200mAh	Nominal Voltage 3.6V	Max. Constant Current 120mA	Max. Pulse Current 200mA	Weight 30g	Dimension Ø18.8x50.5mm	Operating temperature -55°C~85°C
---	-------------------------	--------------------------------	-----------------------------	---------------	---------------------------	-------------------------------------


### Caution:

- Do not charge nor short-circuit.
- Do not solder directly nor force-discharge.
- Do not heat, disassemble, dispose of in fire.
- Do not apply strong pressure nor handle roughly.
- Do not use new and used batteries together nor mix different types of batteries.
- Do not reverse the positive and negative pole of battery while using it.

### Voltage vs Temperature

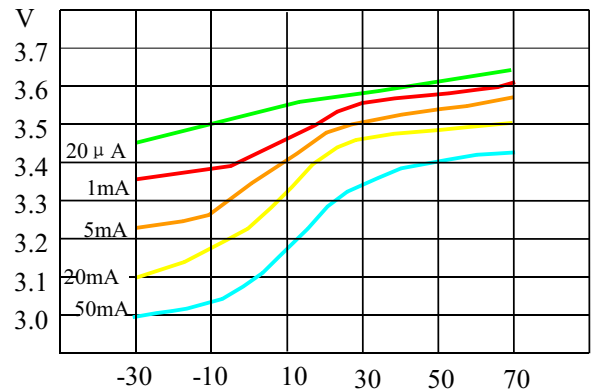

### Capacity vs Current

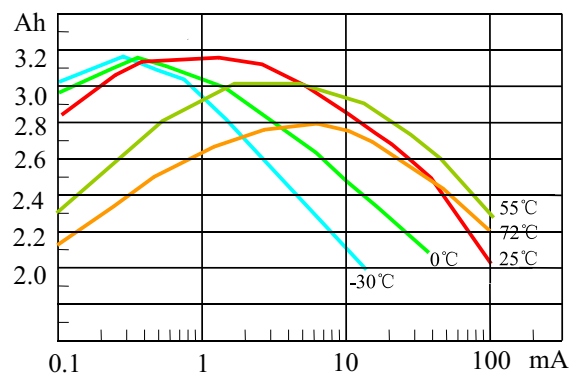

### Discharge Characteristics at 23±2°C

